

RR-COM9500 COMPRESSION LOAD CELL




RED ROOSTER LIFTING

Technical Specification		
Standard Load Ranges	tonne	25, 50, 100, 200, 300, 400, 500, 1000, 1500
Safe Service Load	%	150
Ultimate Load	%	500
Safe Side Load	%	100
Input Resistance	Ω	700 (500-1500 to 1400 Ω)
Output Resistance	Ω	700 +/- 2
Creep after 30 mins (20°C)	%	< +/- 0.05%
Operational Temp Range	°C	-20 to +80
Environmental Protection	IP67	
Cable Length Standard	Metres	10
Insulation	G Ω	>2 at 100V.dc
Electrical Connections IP68 6 Way Amphenol Connector		
Pin A	+ Input	
Pin E	+ Output	
Pin C	- Input	
Pin F	- Output	

Note: All percentages related to Full Rated Load



Image for illustration purposes only

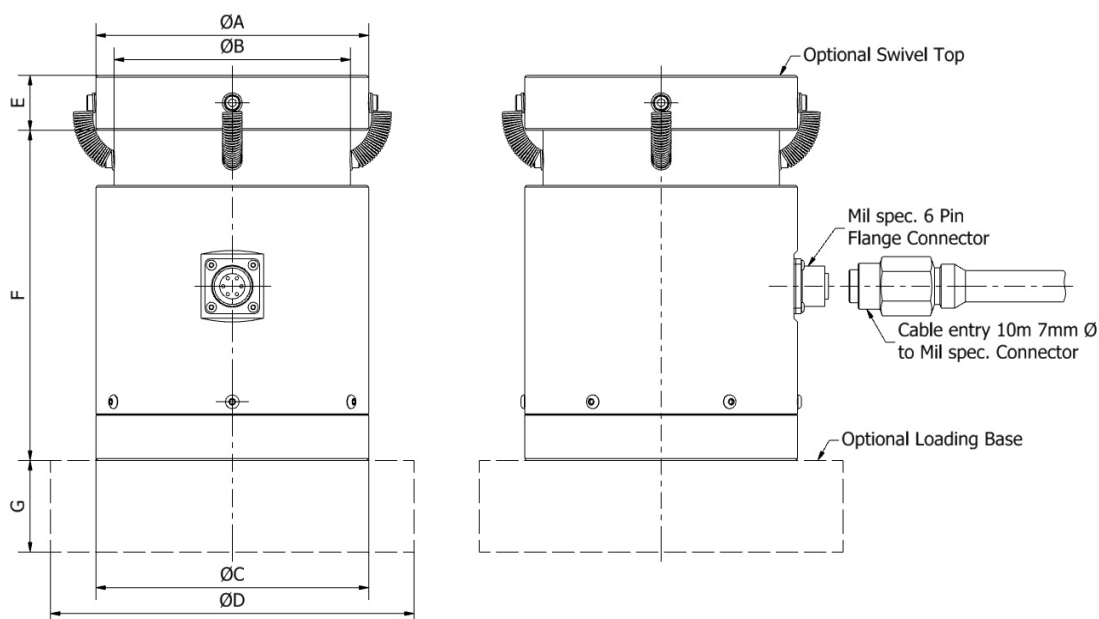

Cell Type	Capacity	ØA	ØB	ØC	ØD	E	F	G
Comp 25	25 tonne	75	60	75	125	15	100	30
Comp 50-100	100 tonne	100	80	100	150	20	150	50
Comp 200	200 tonne	127	110	127	150	30	180	50
Comp 300	300 tonne	150	130	150	200	30	180	50
Comp 400	400 tonne	150	136	150	200	38	180	50
Comp 500	500 tonne	203	170.5	203	265	50	300	50
Comp 1000	1000 tonne	290	250	290	335	50	425	75
Comp 1500	1500 tonne	350	300	350	400	75	490	100

All measurements are in mm
Information subject to change without notice

RED ROOSTER LIFTING

Nauta House, The Meadows
Oldmeldrum, Aberdeenshire
United Kingdom, AB51 0EZ

T: +44 (0) 1651 872101
E: sales@redroosterlifting.com
W: www.redroosterlifting.com